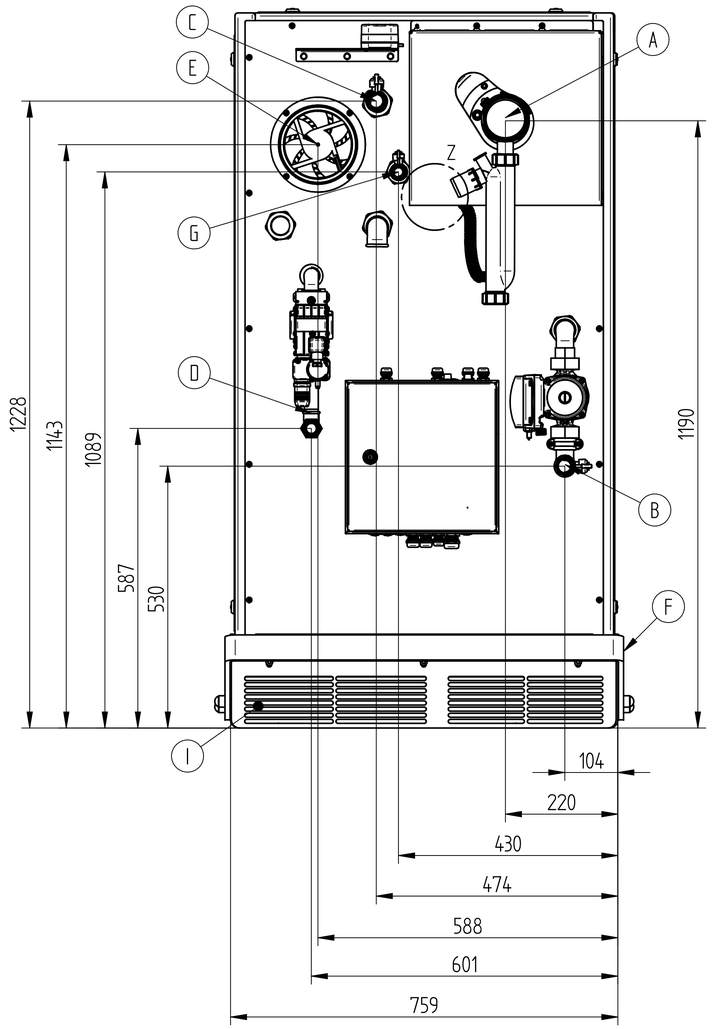

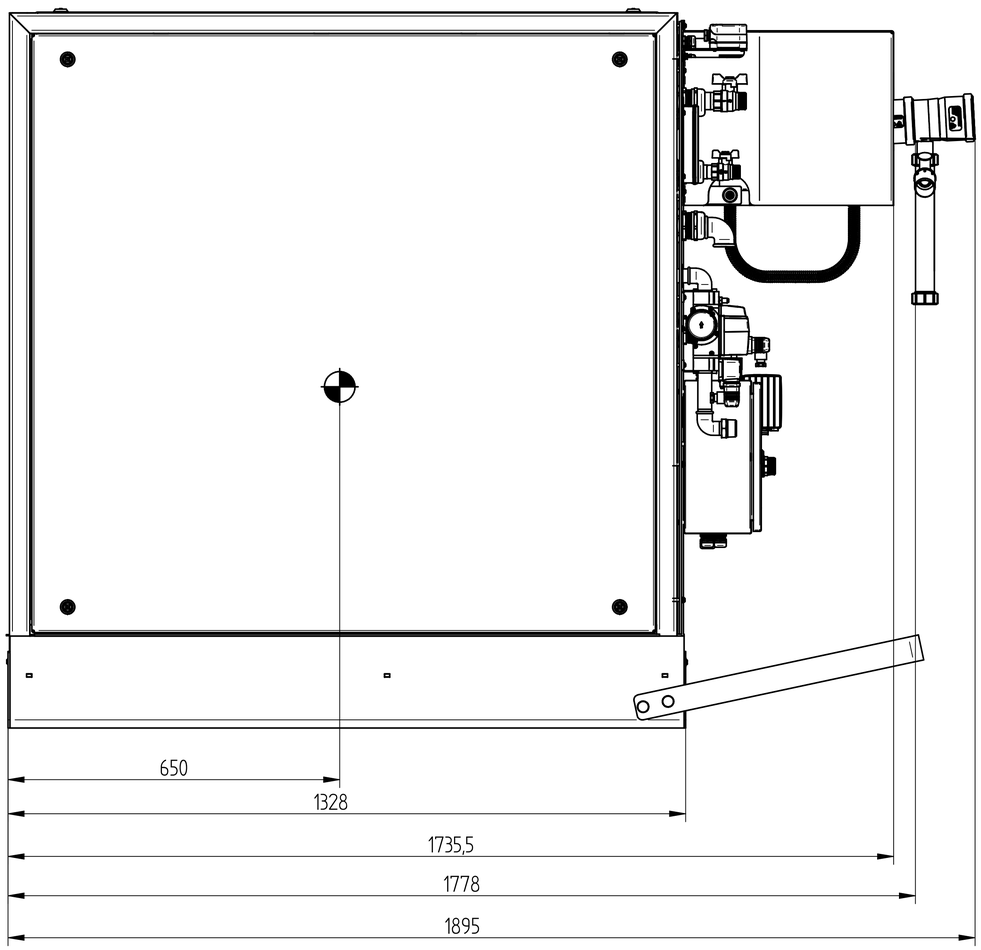

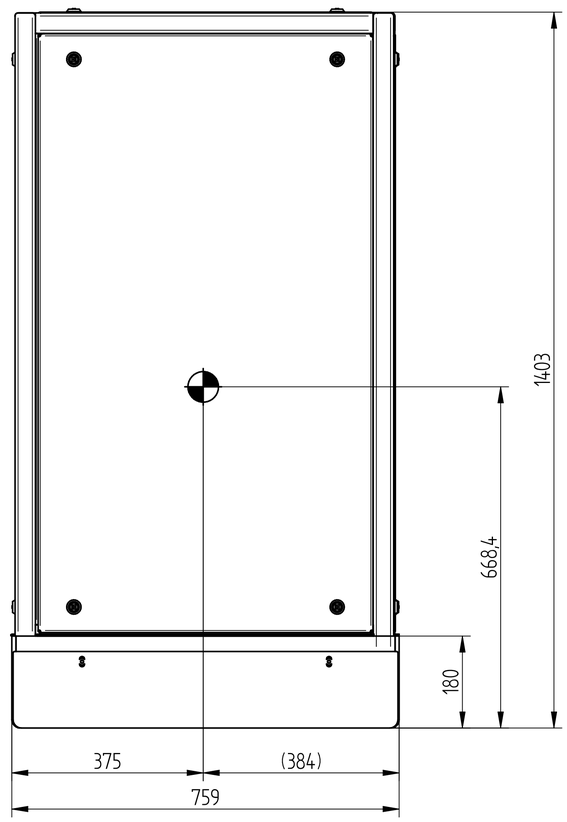

Deutsch		
Position	Bezeichnung	Anschlusstyp
A	Abgas	DN80
B	Rücklauf	1" AG
C	Vorlauf	1" AG
D	Brenngas	1" AG
E	Abluft	DN160
F	Schutzbügel (demontierbar)	
G	MAG Anschlussgruppe	3/4" AG
H	Kondensat	3/4" AG
I	Zuluft	

English		
position	designation	connection type
A	flue gas	DN80
B	flow return	1" AG
C	flow heating	1" AG
D	fuel gas	1" AG
E	exhaust air	DN160
F	transport protection (removeable)	
G	expansion vessel	3/4" AG
H	condensate	3/4" AG
I	supply air	



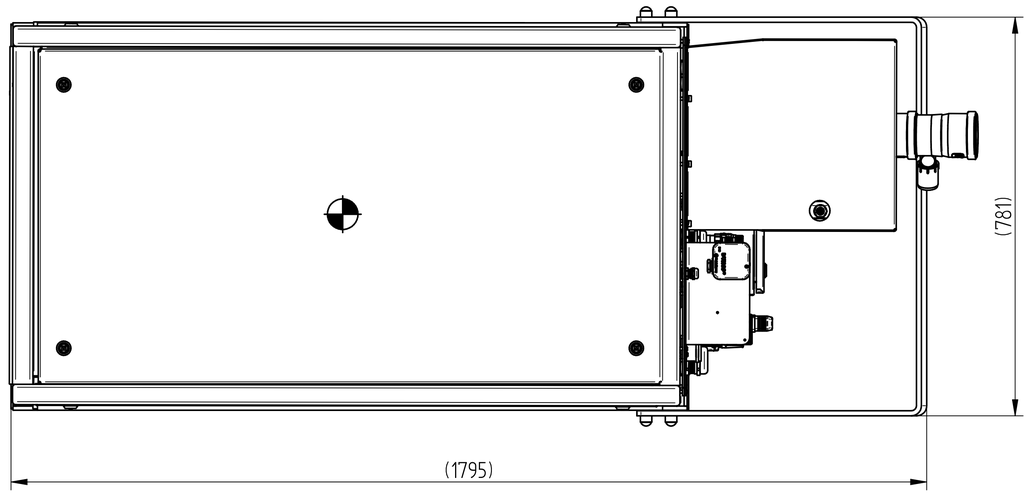

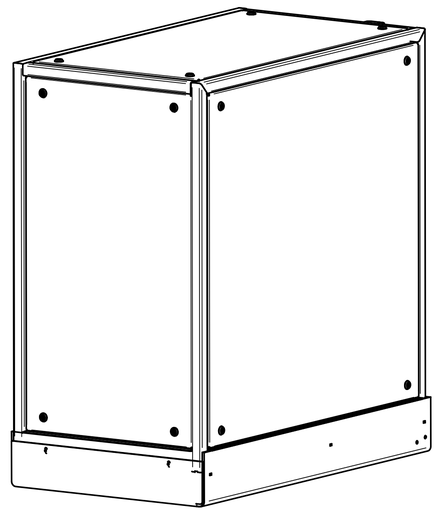

1:10

ATTENTION
Unbending data is for information purposes only! Information on outer dimensions and bending allowances do not dismiss the checker from inspection!

Tolerances according:

weight: 1038 kg

scale: 1:6 particularity:

material:

title: 17.0/21.0/25.0/30.0 kW (eL)

This drawing must not be copied, forwarded, reproduced or otherwise used in any other way.

part number: 3249402

raw part number:

sheet: 1 / 2 sheets

ind.	modification	date	name

origin: modification: current index: material: thickness:

A1

Mindestanforderung freier Wartungsraum
(Minimum maintenance room)

Mindestanforderung freier Wartungsraum
über BHKW 700mm
(Minimum maintenance room above CHP 700mm)

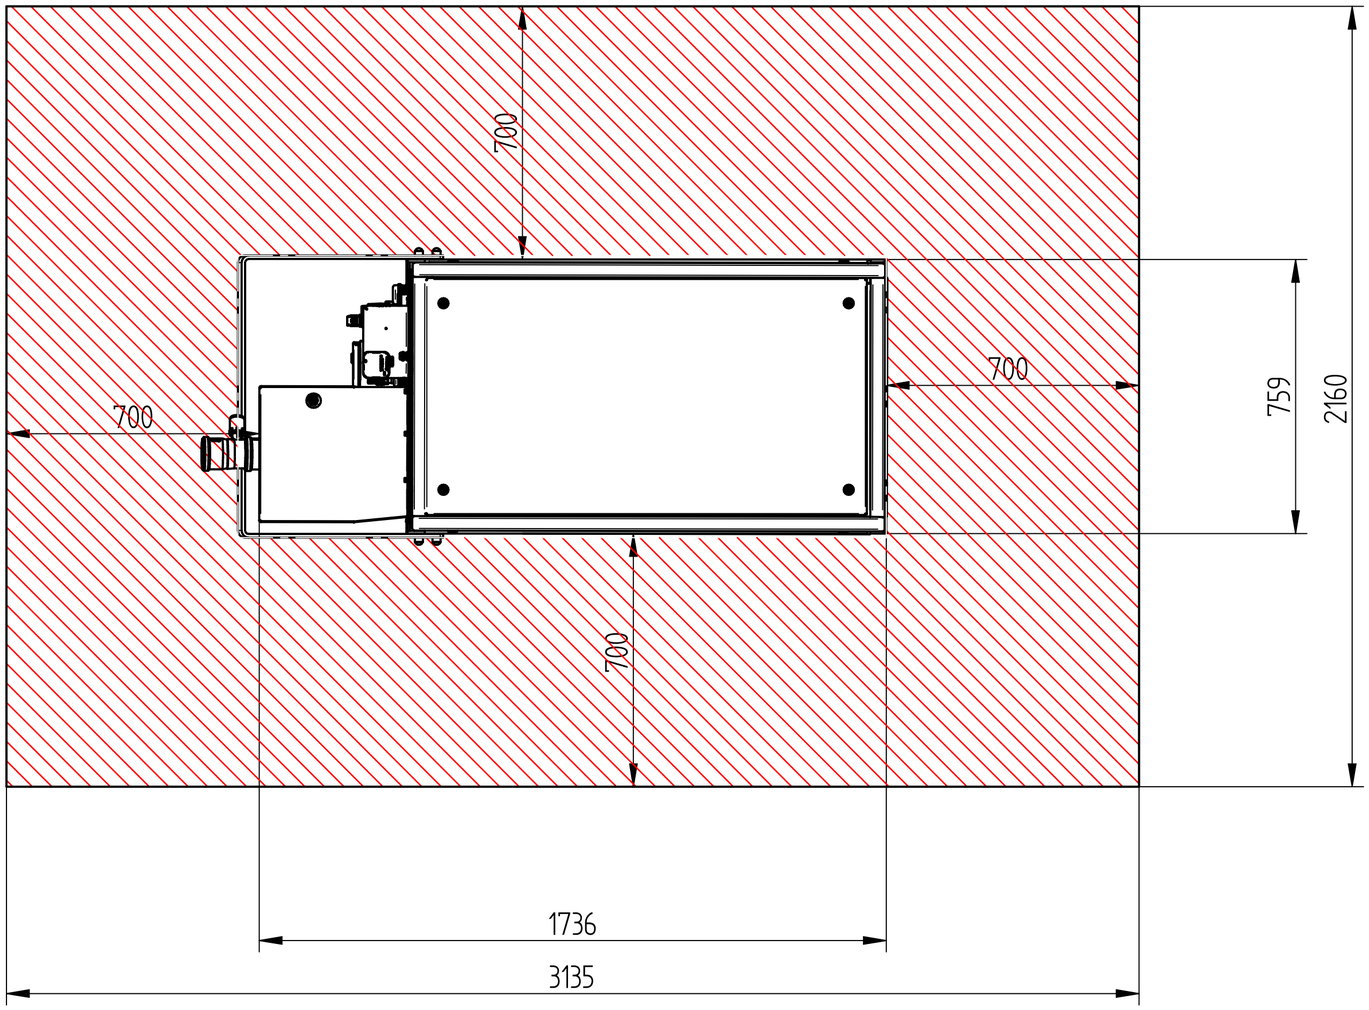

Sollten die Mindestanforderung nicht eingehalten werden können,
nehmen Sie bitte Kontakt zum Hersteller auf,
um Lösungsmöglichkeiten abzusprechen.
If the minumum requirement can not be met,
please contact the manufacturer to discuss possible solutions.

ATTENTION!
Unwinding data is for information purposes only! Information on outer dimensions and bending allowances do not dismiss the checker from inspection!

Tolerances according:

weight: 1038 kg

scale: 1:12

particularity:

material:

title: 17.0/21.0/25.0/30.0 kW (el)

This drawing must not be copied, forwarded, reproduced or otherwise used in any other way.

part number: 3249402

raw part number:

sheet: 2

2 sheets

ind.	modification	date	name

origin:

modification:

current index:

material thickness:

A2