

Deutsch		
Position	Bezeichnung	Anschlusstyp
A	Abgas	DN80
B	Rücklauf	1" AG
C	Vorlauf	1" AG
D	Brennstoff	1/2" IG
E	Abluft	DN100
F	Schutzbügel (demontierbar)	
G	Kondensat	3/4" AG
H	Zuluft	

English		
position	designation	connection type
A	flue gas	DN80
B	flow return	1" AG
C	flow heating	1" AG
F	fuel gas	1/2" IG
D	exhaust air	DN100
G	transport protection (removeable)	
E	condensate	3/4" AG
H	supply air	


ATTENTION Drawing data is for information purpose only. Information on other dimensions and bending allowances do not bypass the checker from recipient.		Tolerances according	weight 652,0 kg	scale 1:6	particularity
		material:		title 9.5/12.5 kW (el)	
		This drawing must not be copied, forwarded, reproduced or otherwise used in any other way.		part number:	row part number:
ind.	modification	date	name	origm	modification
					current index
					material thickness


1:10

sheet 1
2 sheets

Mindestanforderung freier
Wartungsraum
(Minimum maintenance room)

Wartungsraum nach Klärung und
Herstellerfreigabe
(Maintenance room after
clarification and manufacturer
authorization)

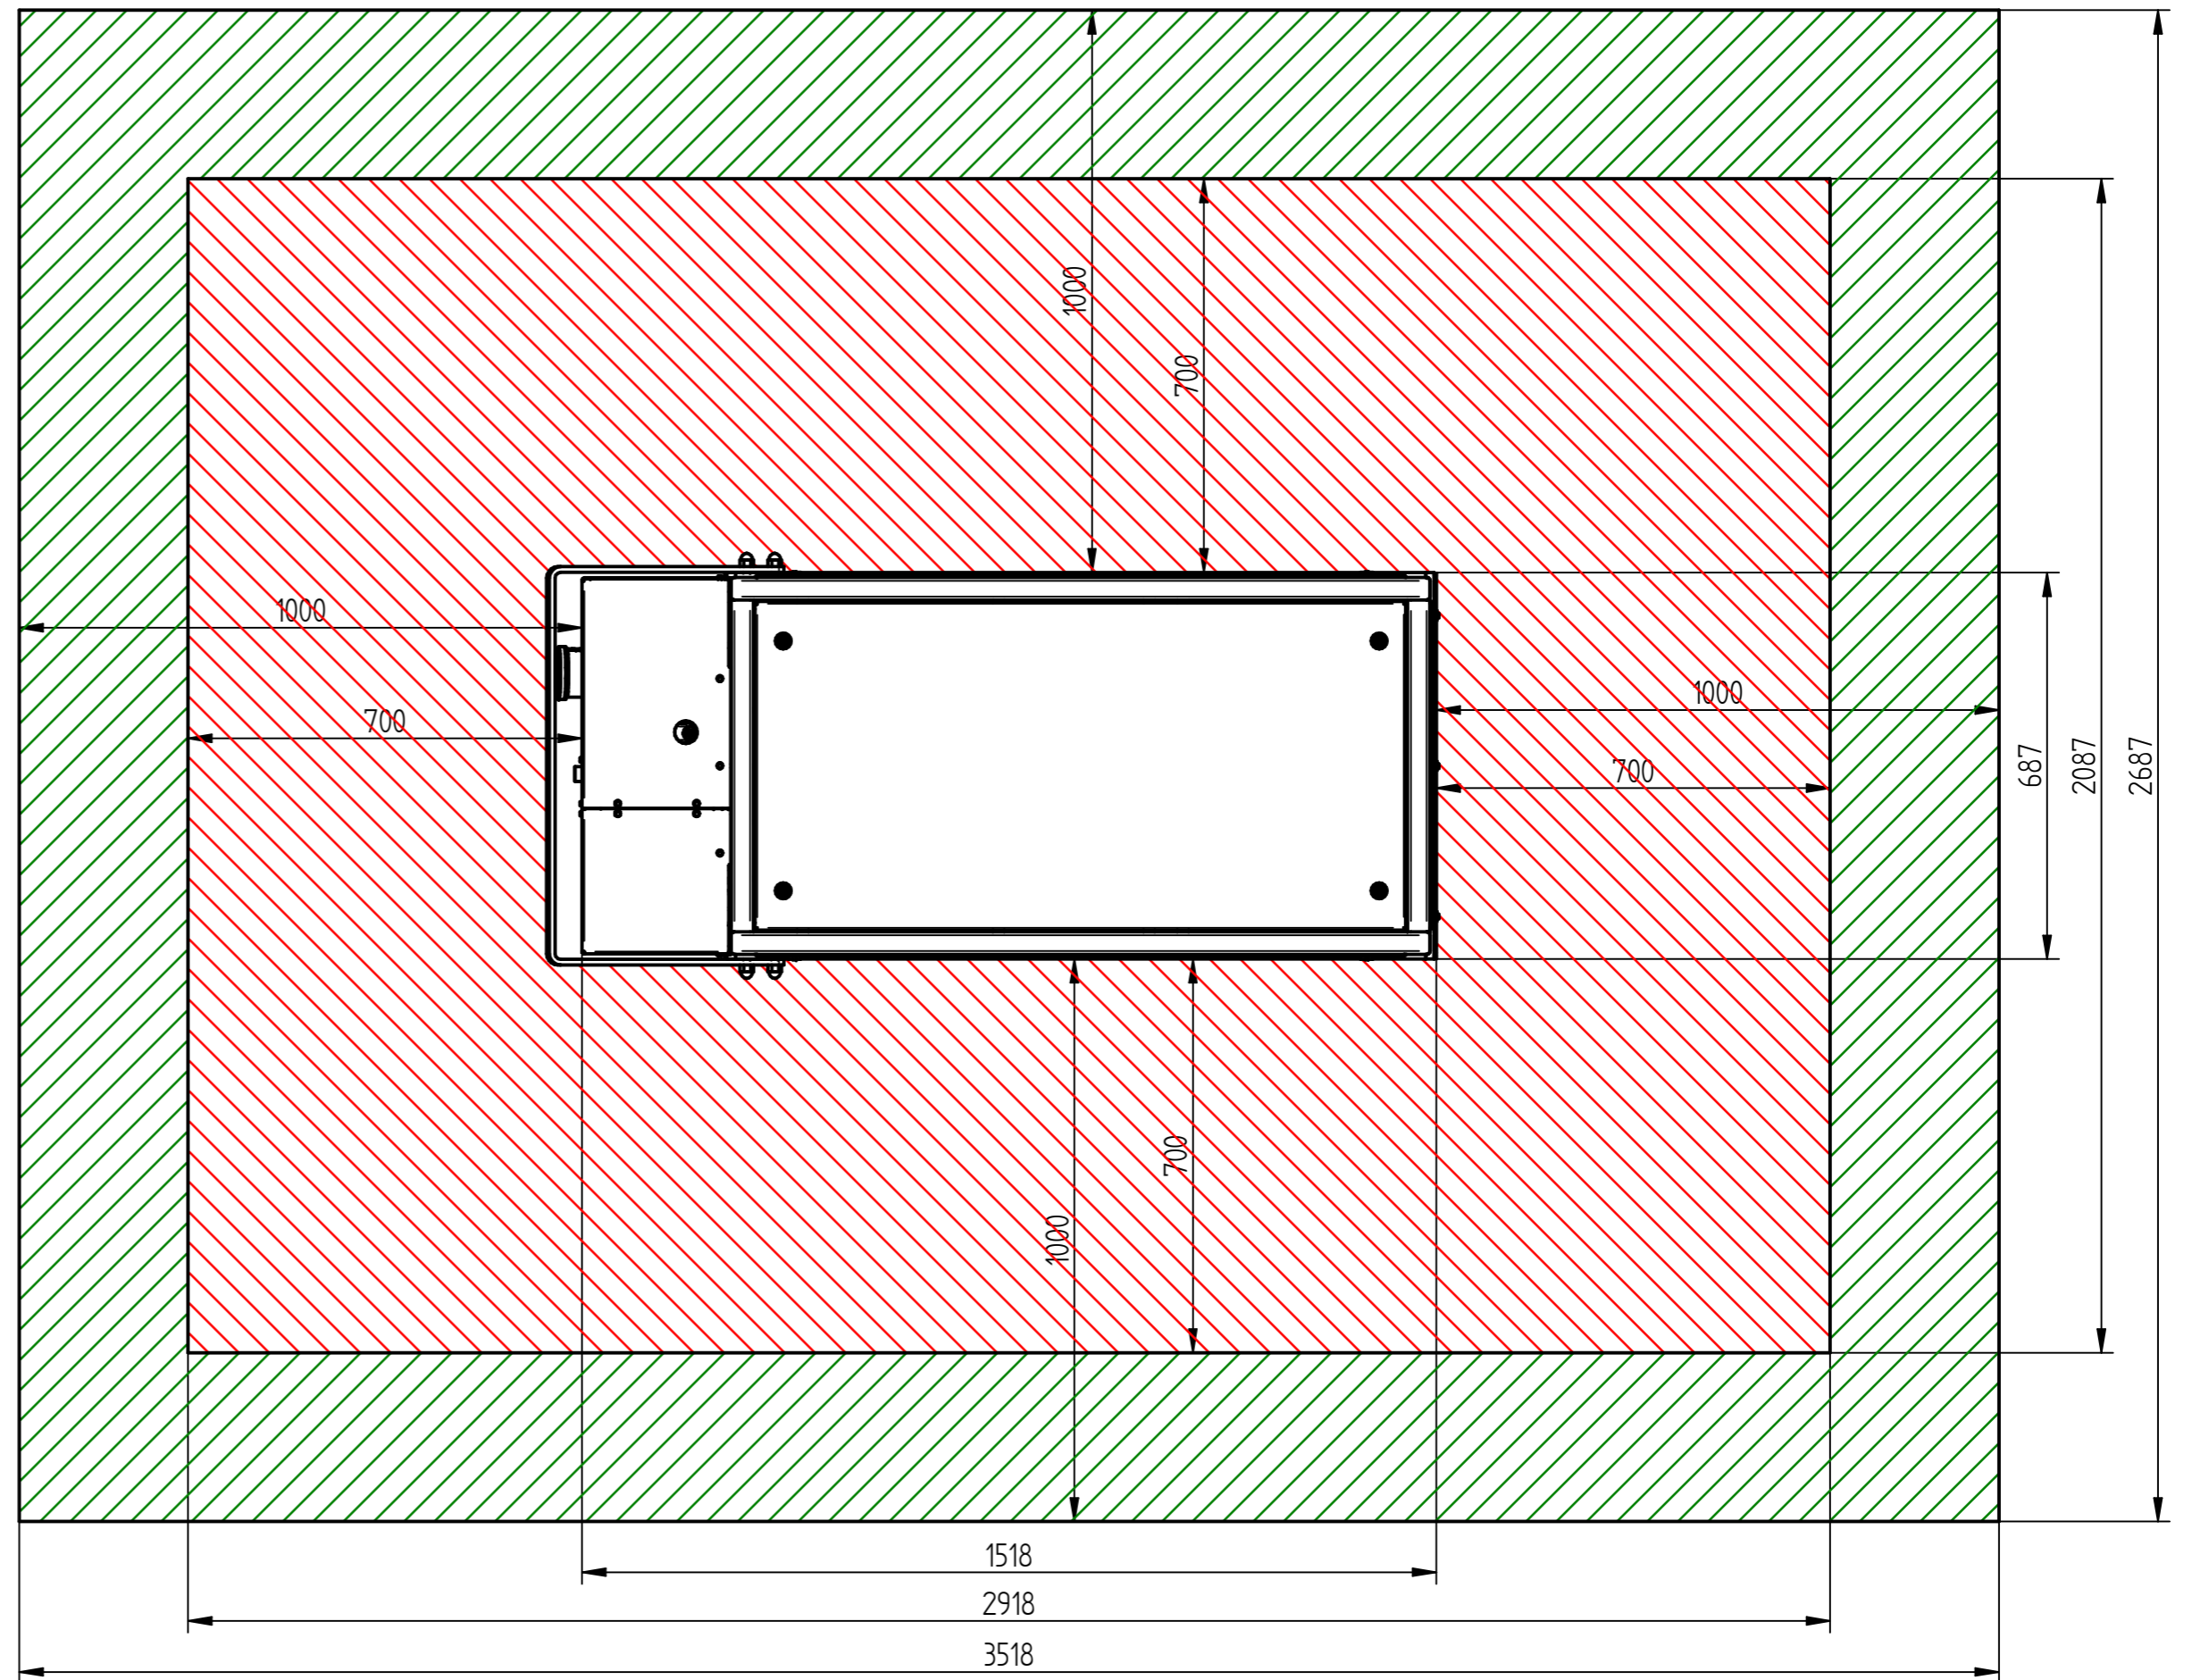

ATTENTION Unwinding data is for information purposes only! Information on outer dimensions and bending allowances do not dismis the checker from inspection!						Tolerances according:		weight:		scale: 1:12		particularity:	
								652,0 kg		material:			
								title:					
								9.5/12.5 kW (el)					
				This drawing must not be copied, forwarded, reproduced or otherwise used in any other way.				part number:		raw part number:		sheet:	
												2	
								current index:		material thickness:		2 sheets	
ind.				modification		date		name		origin:		A2	