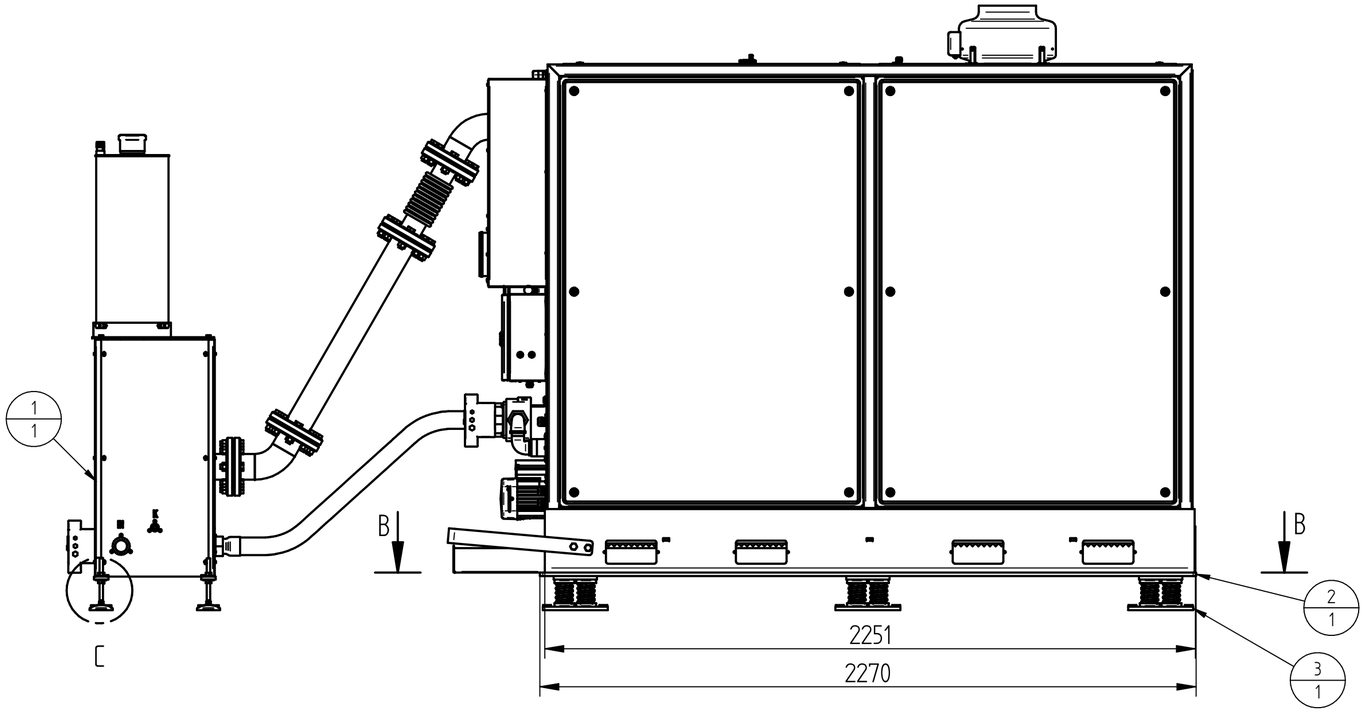

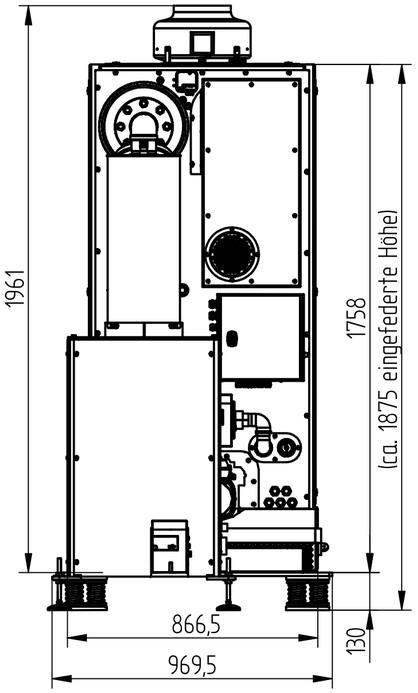

Einzelheit A
1:10



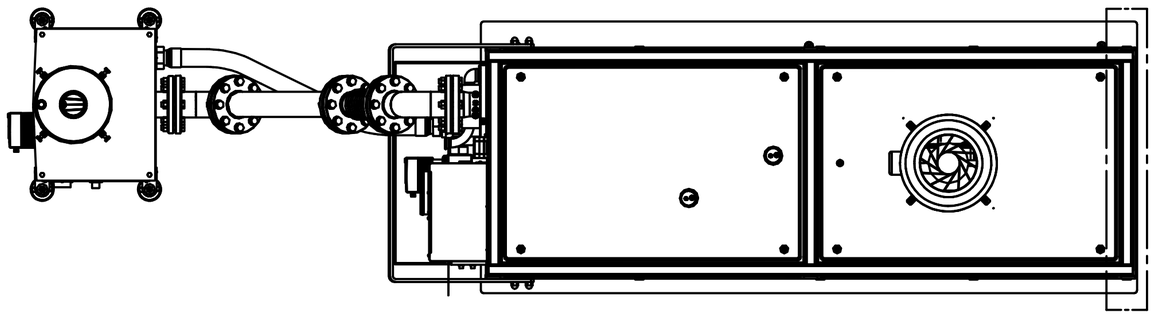

Schnitt B-B

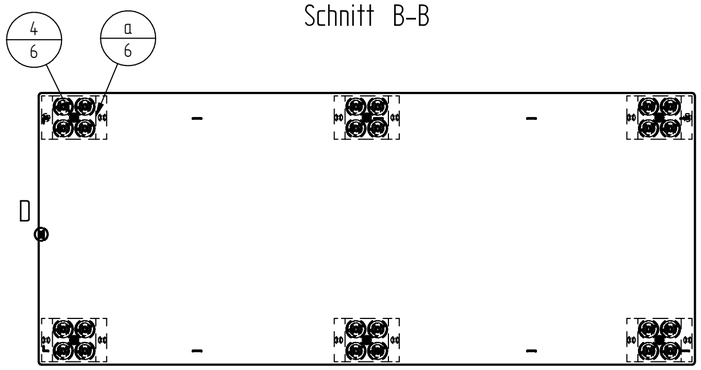

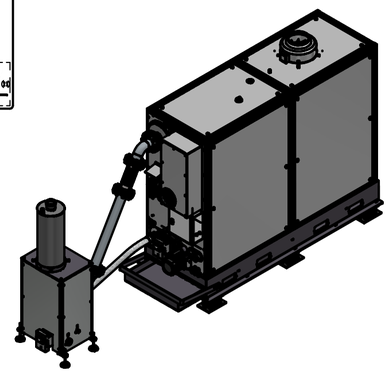

Einzelheit D
1:2

Einzelheit C
1:5



BHKW vorne bündig und seitlich mit einem Abstand von 50 bzw. 90mm auf Schwingungsdämpfungsplatte ausrichten.
a = Federblockelement 3150433
Back = B (siehe Einzelheit D)
Die Befestigung der Federelemente auf dem Fundament erfolgt bauseitig.

Pos.	Art.-Nr.	Rev.	Titel	Stk.
	3241192		Positionierung BHKW 50.0 kW (el) BW auf Schwingungsdämpfungsplatte	
1	3010503		50.0 kW (el) BW	1
2	3191069		Schwingungsdämpfungsplatte 50 kW RAL 7016	1
3	3240617		Federblockelemente-Satz 50.0 kW (el)	1
4	3070459		Senkkopfschraube ISO 10642 M12 x 30 8.8 vz	6
5	3070023		Sechskantmutter ISO 4032 M12 vz	8
6	3070146		Kotflügelscheibe M12 verzinkt DIN 9021 140 HV	8
7	3071063		Gelenkfüße mit Anschraubbohrungen Φ80mm	4
8	3071062		Gewindespindel für Gelenkfüße M12x150mm	4

ATTENTION!
Unwinding data is for information purposes only! Information on outer dimensions and bending allowances do not dismiss the checker from inspection!

Tolerances according:
weight:
scale: 1:15
particularity:
material:

title:
Positionierung BHKW 50.0 kW (el) BW auf Schwingungsdämpfungsplatte

This drawing must not be copied, forwarded, reproduced or otherwise used in any other way.

part number:
raw part number:
sheet:
sheets

ind.	modification	date	name

origin:
modification:
current index:
material thickness:

A2